

(12) UK Patent Application (19) GB (11) 2 328 551 (13) A

(43) Date of A Publication 24.02.1999

(21) Application No 9816323.1

(22) Date of Filing 28.07.1998

(30) Priority Data

(31) 9716033 (32) 30.07.1997 (33) GB

(71) Applicant(s)

Discreet Logic Inc
(Incorporated in Canada - Quebec)
10 Duke Street, Old Montreal, Quebec H3C 2L7,
Canada

(72) Inventor(s)

Charles Savoie

(74) Agent and/or Address for Service

Atkinson & Co
The Technology Park, 60 Shirland Lane, Lower Don
Valley, SHEFFIELD, S9 3PA, United Kingdom

(51) INT CL⁶

G11B 27/031

(52) UK CL (Edition Q)

G5R RB81

(56) Documents Cited

GB 2312081 A EP 0803873 A2 EP 0526064 A2
WO 93/21635 A1

(58) Field of Search

UK CL (Edition P) G5R RB81
INT CL⁶ G11B 27/028 27/029 27/031 27/036
ONLINE: WPI, EDOC, JAPIO

(54) Abstract Title

Processing edit decision list data

(57) A processing system for processing data representing edit decision lists having edit decisions with edit data 801, representing the type of edit to take place, and frame range data 808, 810, representing the frames over which the edit is to take place. An input device applies input data to the processing system in response to user manipulations specifying changes in the edit data 802. The processing device is configured to identify an associated function of the identified edit data, calculate modifications to the range data in response to the identified function and write the modified range data to storage.

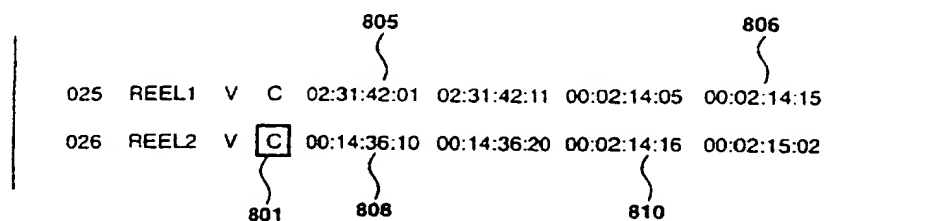


Figure 8A



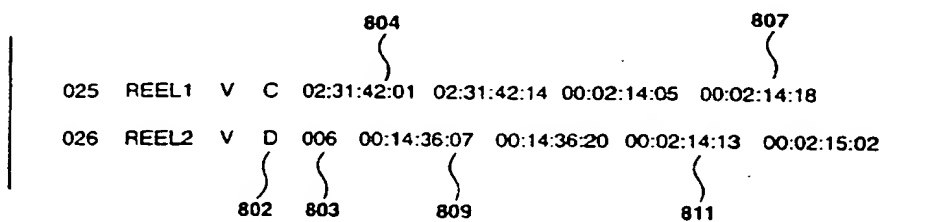


Figure 8B

GB 2 328 551 A

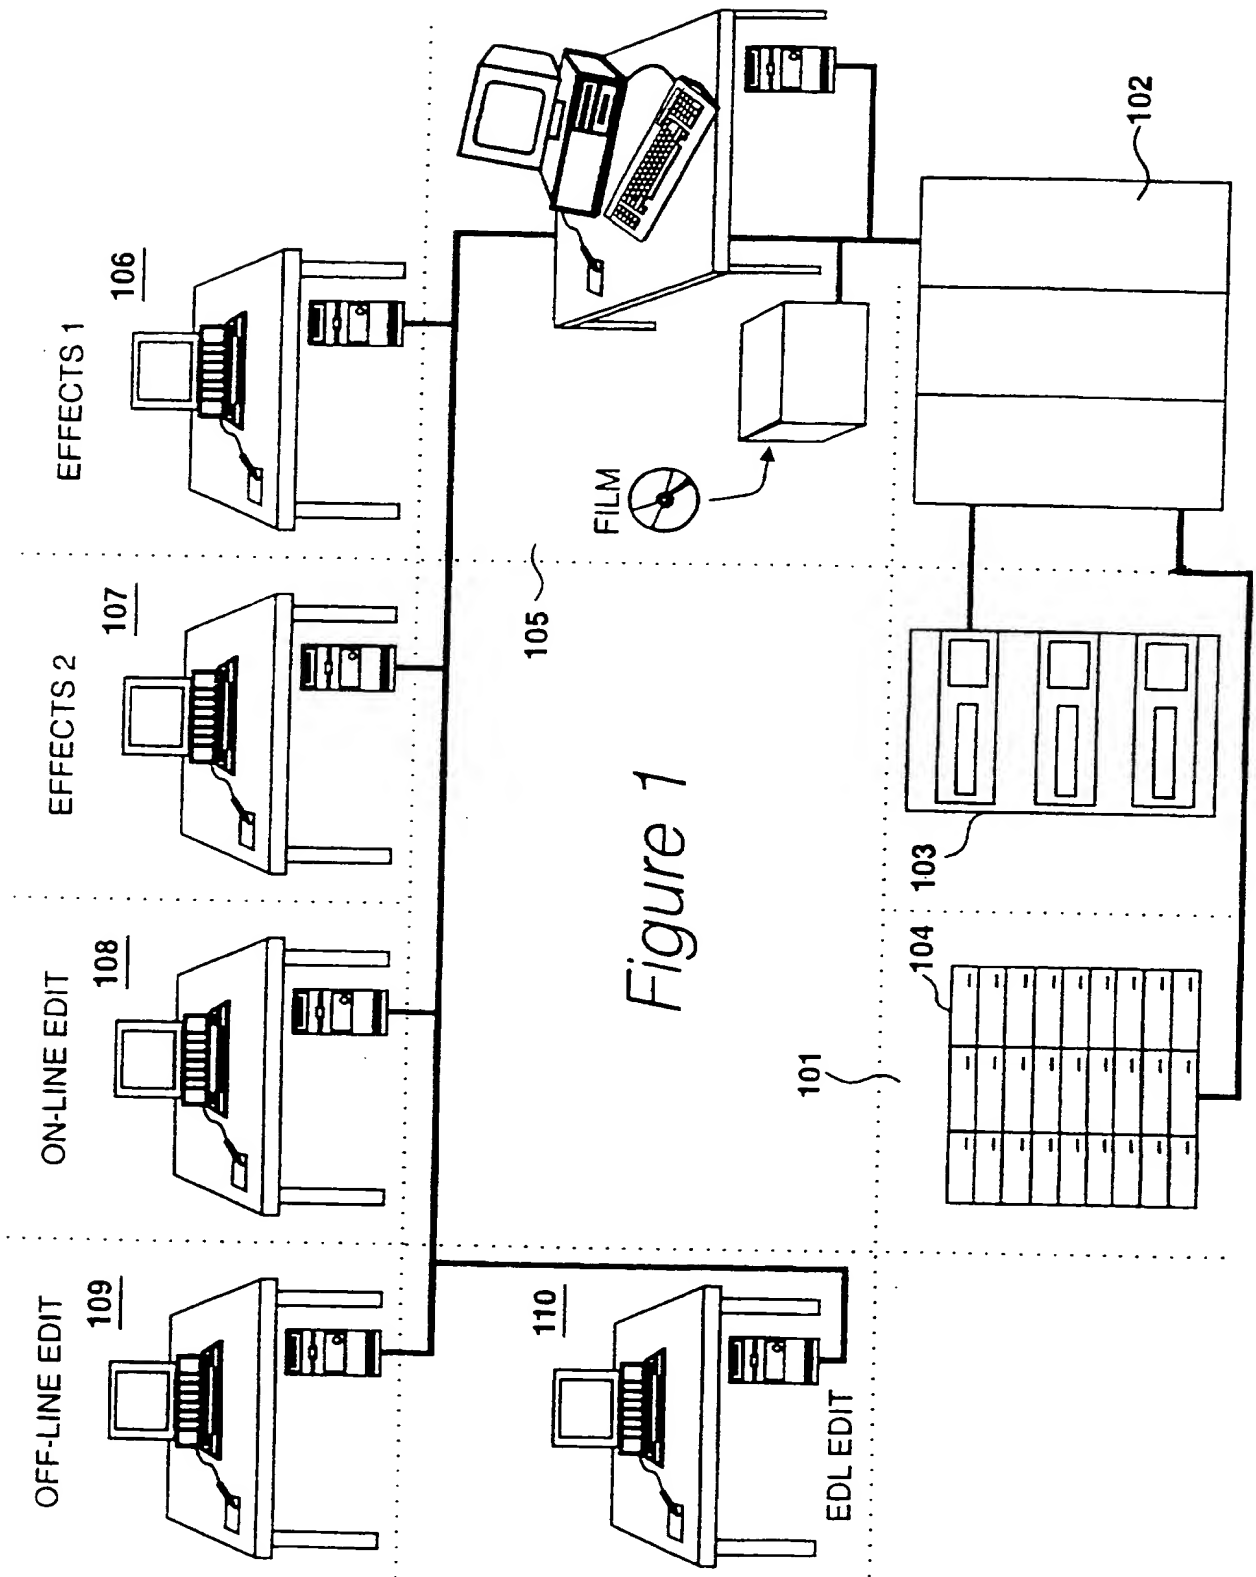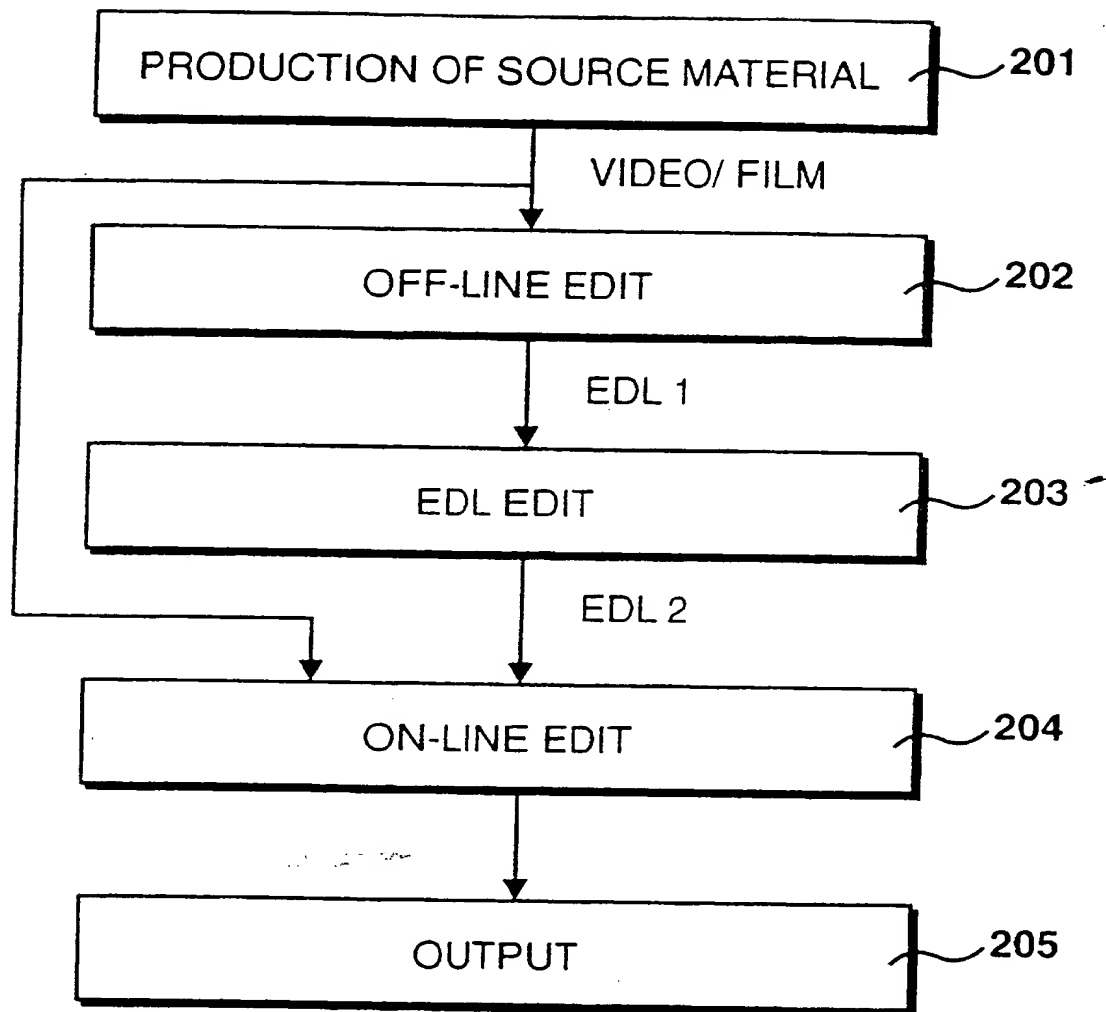

2/12

*Figure 2*

3/12

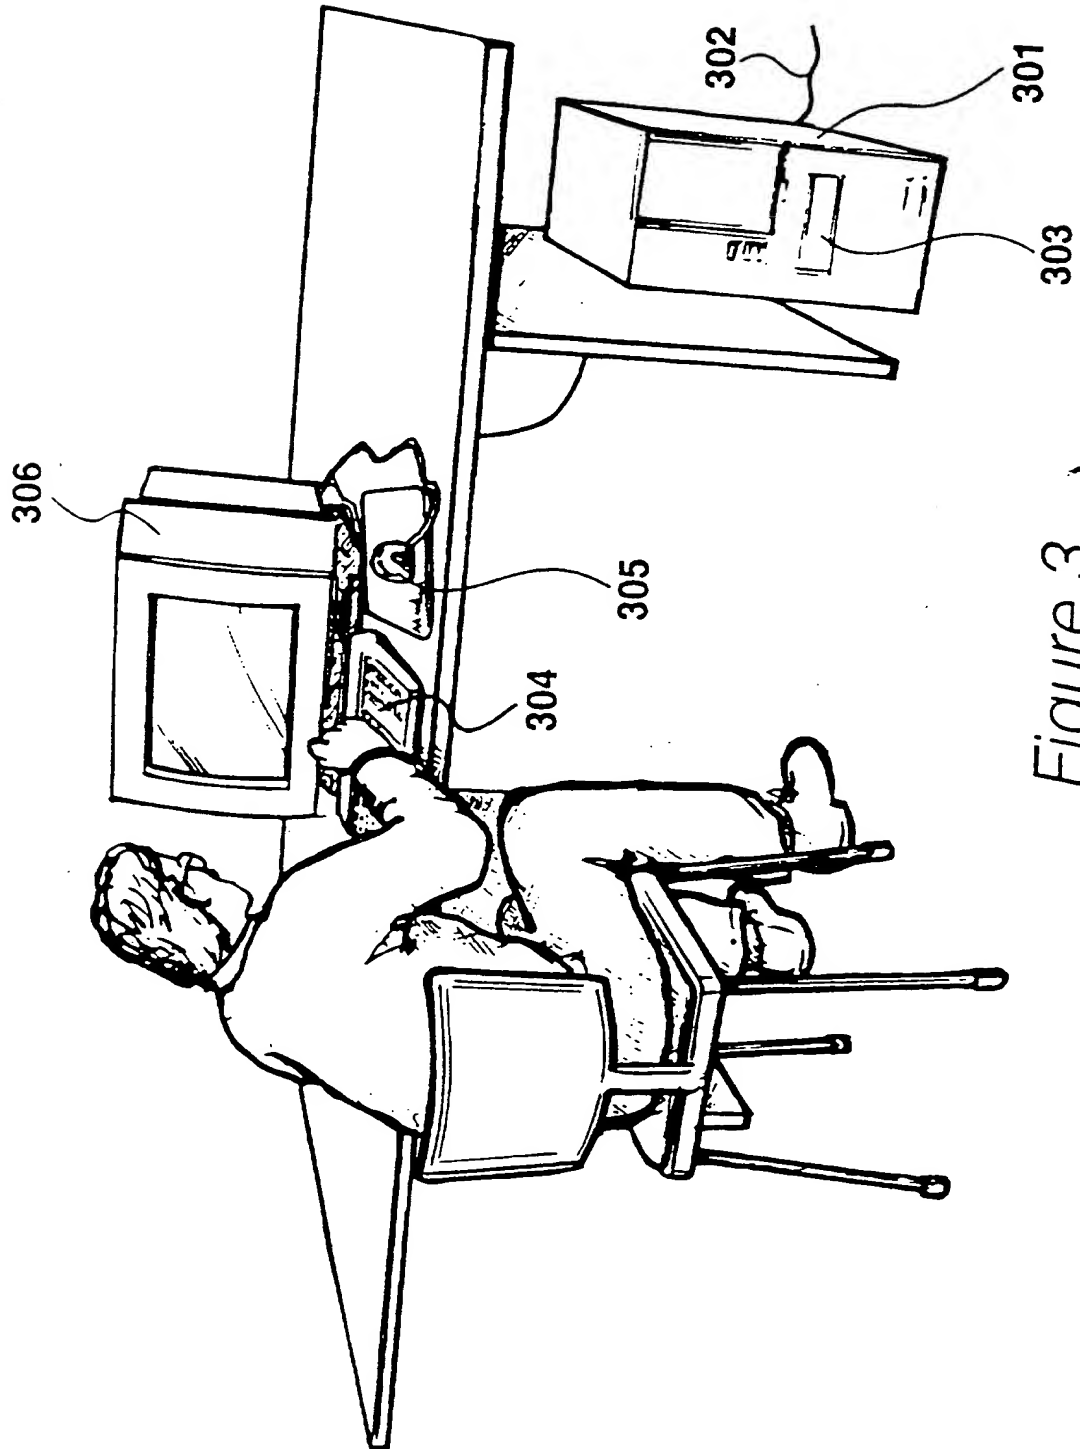


Figure 3

4/12

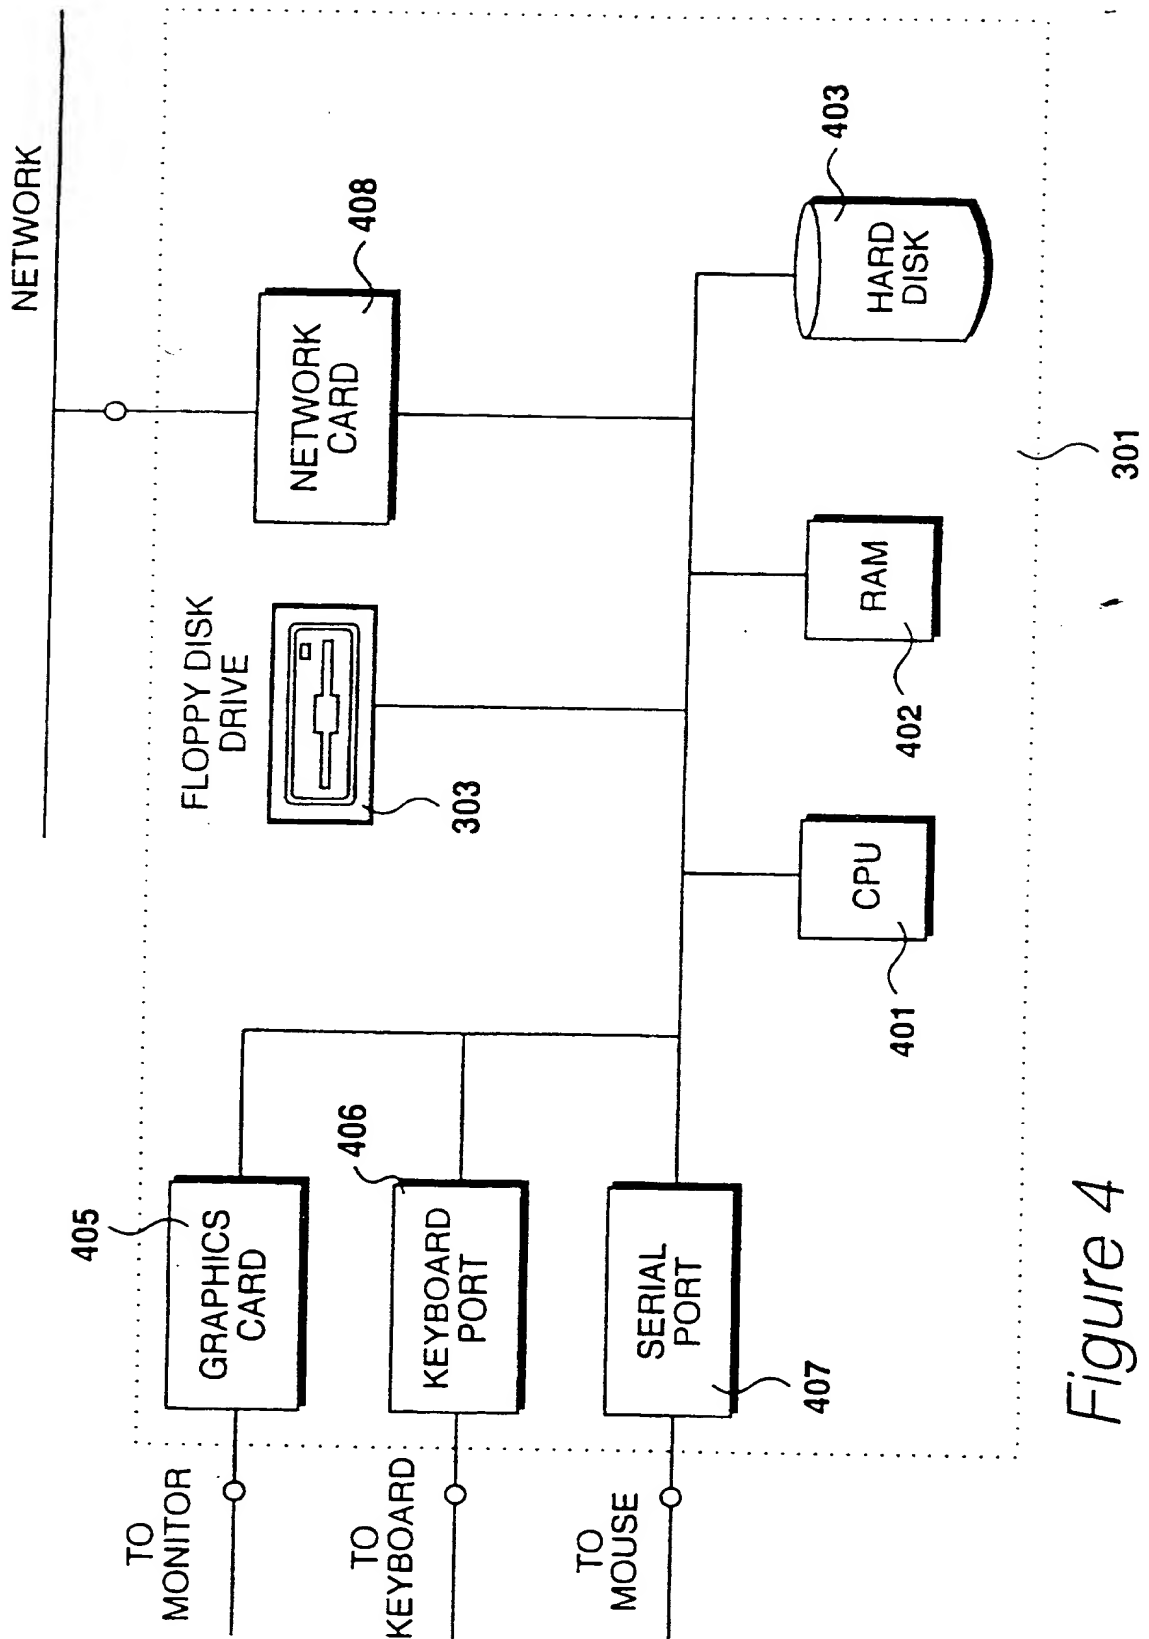
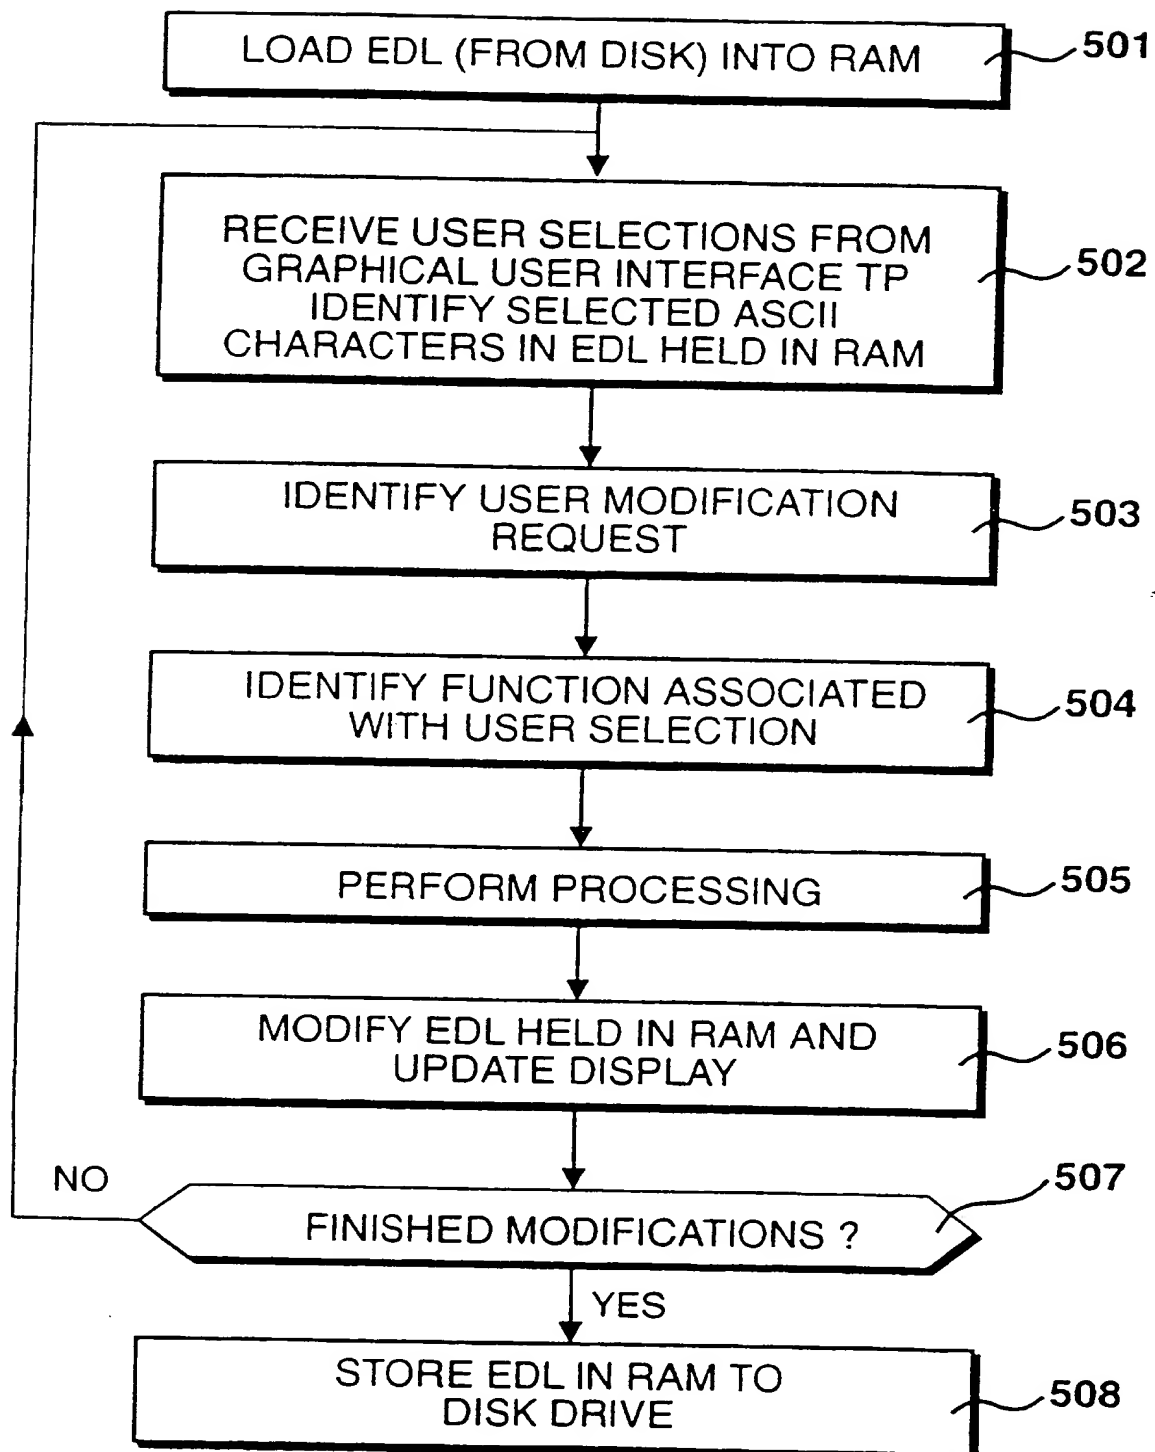


Figure 4

5/12

*Figure 5*

6/12

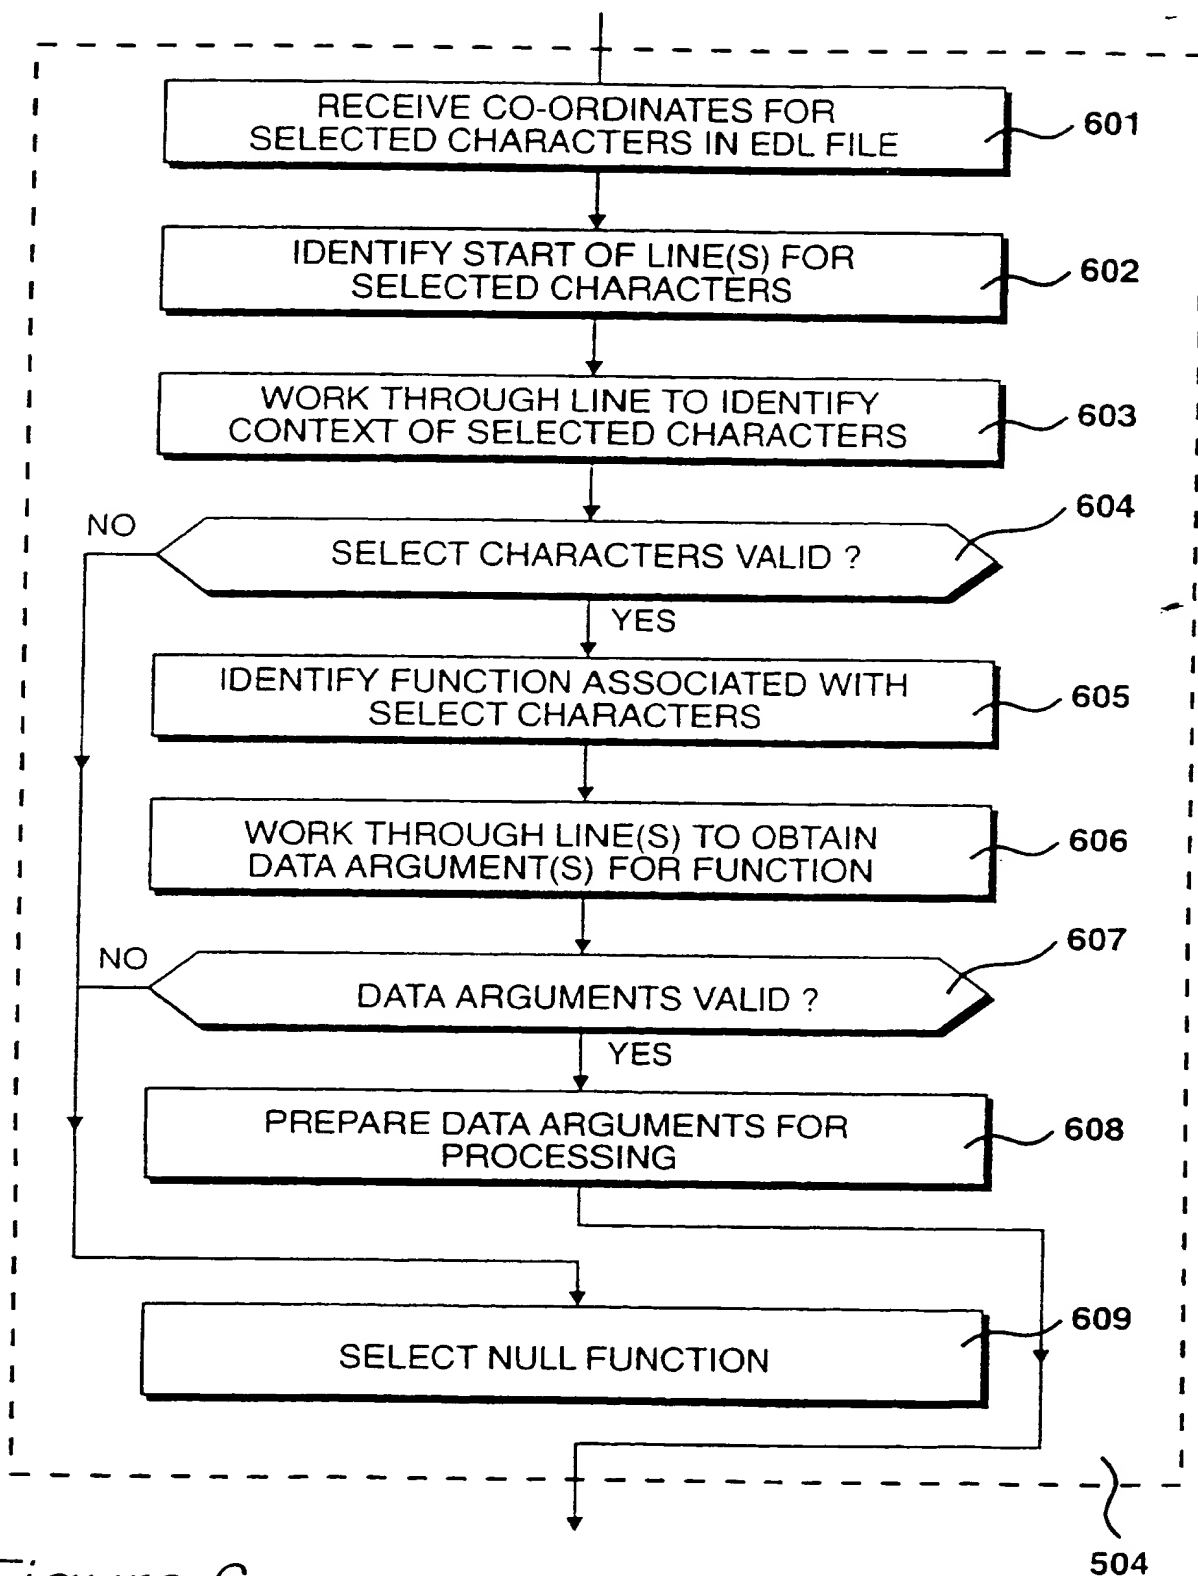


Figure 6

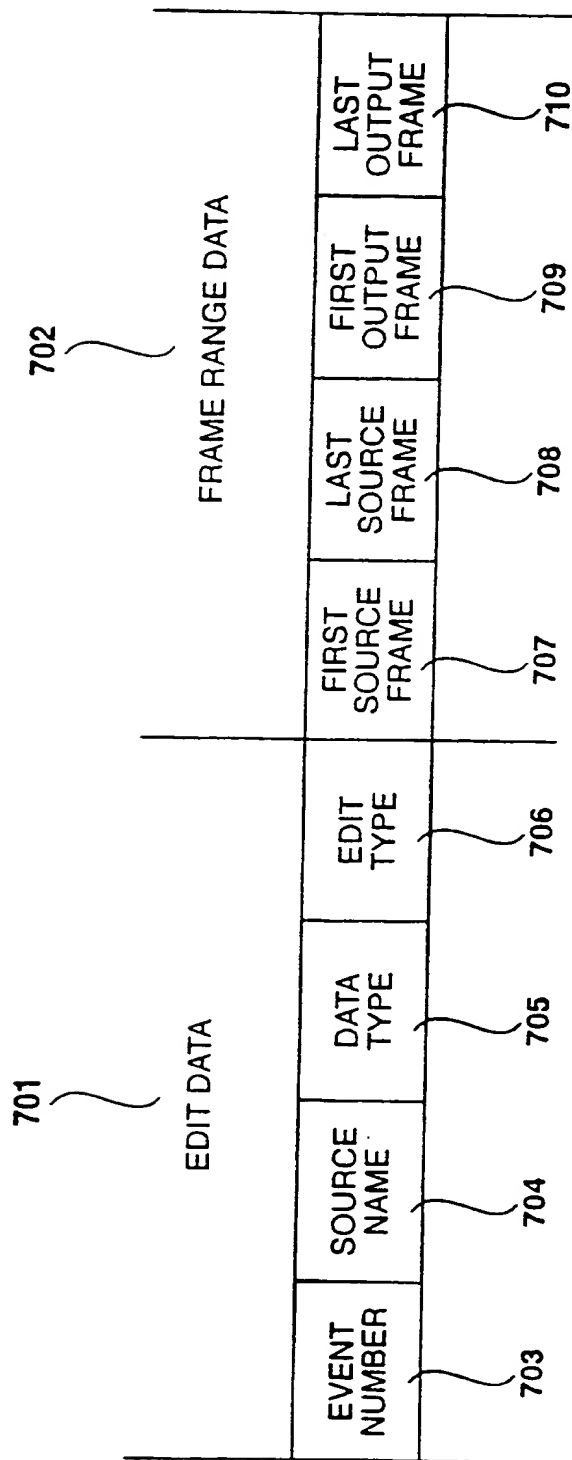


Figure 7

8/12

025	REEL1	V	C	02:31:42:01	02:31:42:11	00:02:14:05	00:02:14:15	805	806
026	REEL2	V	C	00:14:36:10	00:14:36:20	00:02:14:16	00:02:15:02	801	808
									810

Figure 8A

025	REEL1	V	C	02:31:42:01	02:31:42:14	00:02:14:05	00:02:14:18	804	807
026	REEL2	V	D	00:14:36:07	00:14:36:20	00:02:14:13	00:02:15:02	802	803
								809	811

Figure 8B

9/12

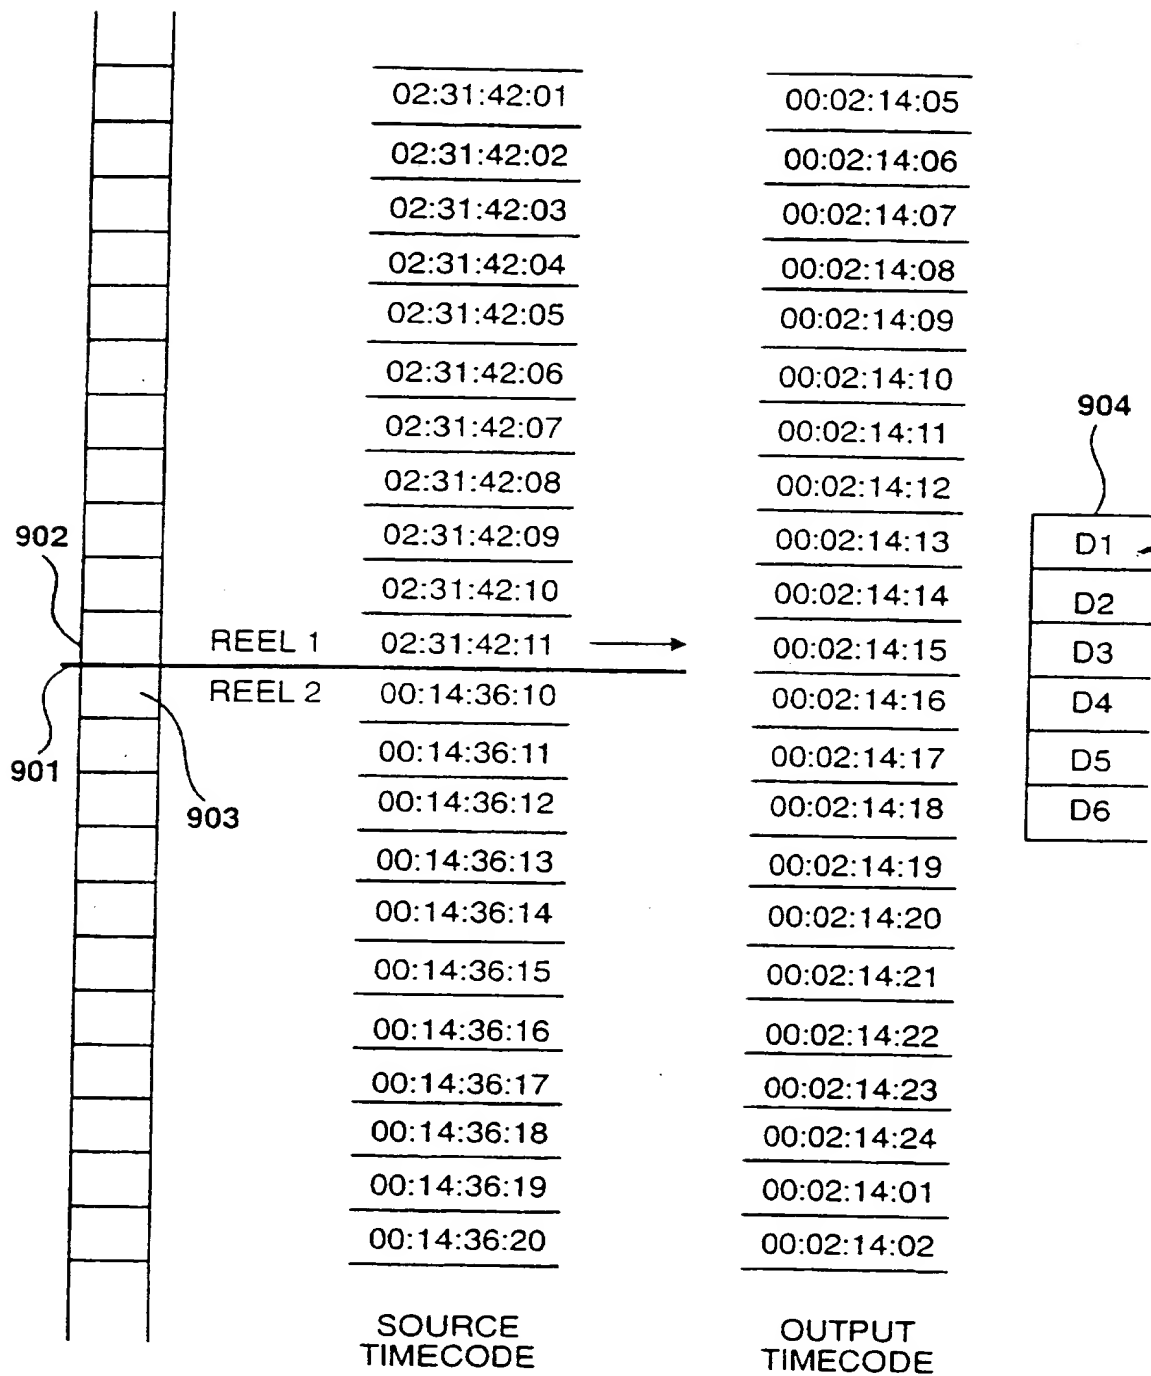
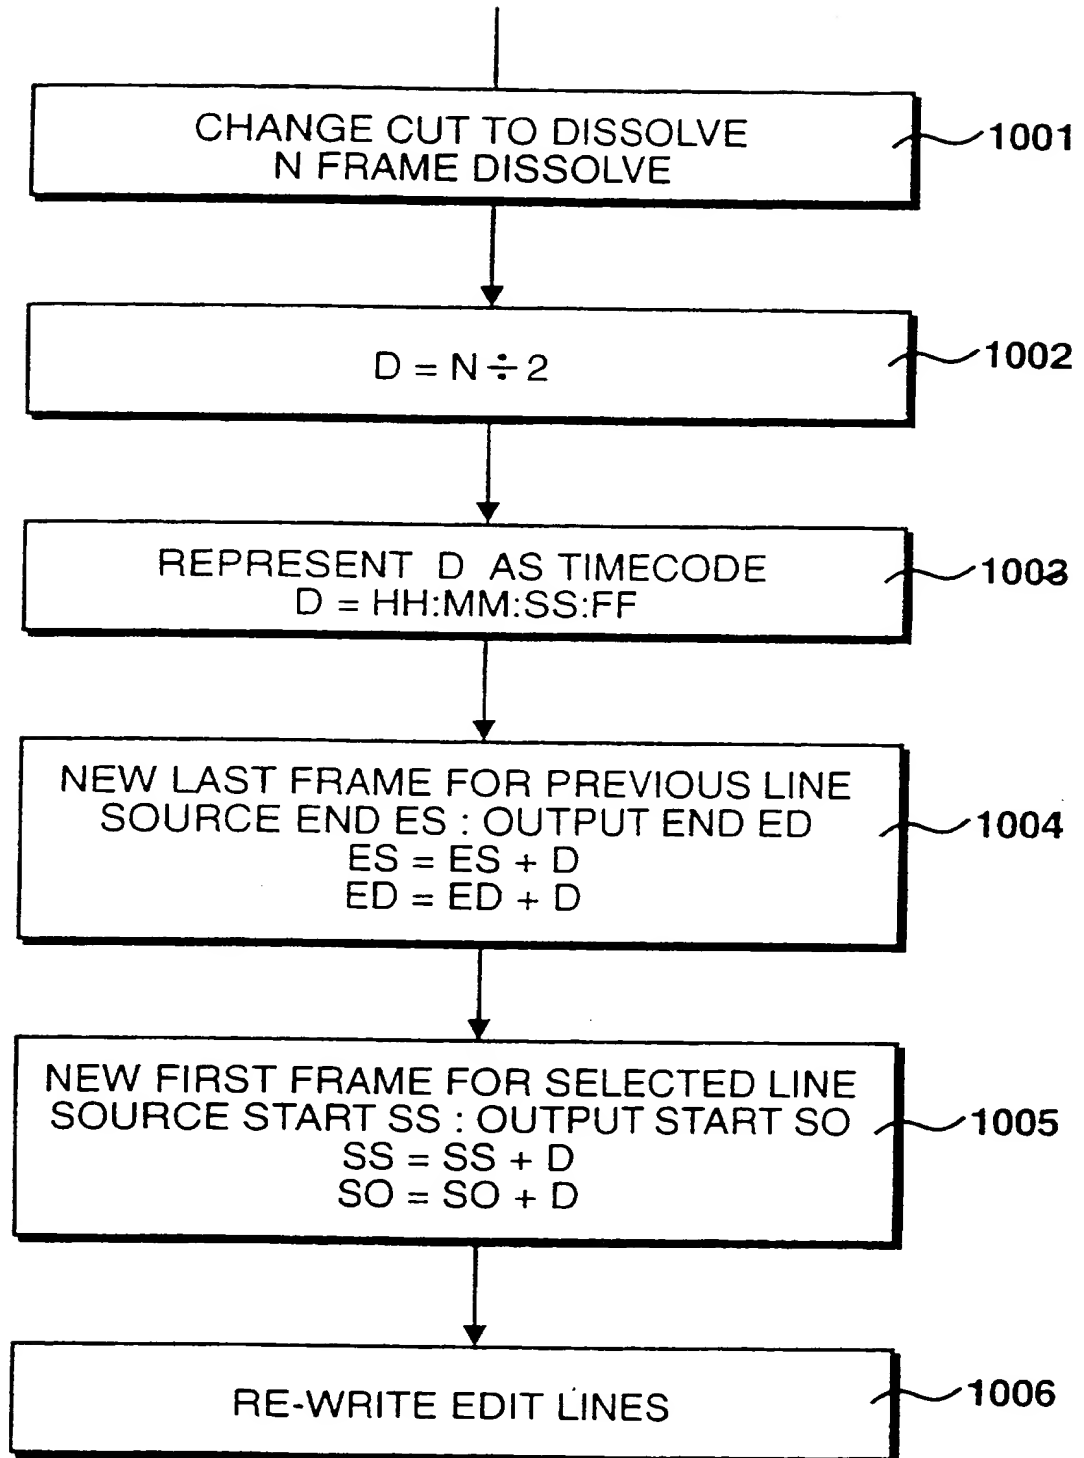


Figure 9

10/12

*Figure 10*

[illegible]

152 — — — — —

153 — — — — —

154 REEL10 V C 00:41:36:03 00:41:36:20 00:15:23:01 00:15:23:18 1103


155 REEL1 V C 02:31:42:01 02:31:42:14 00:15:23:19 00:15:24:08 1106

156 REEL2 V D 006 00:14:36:07 00:14:36:20 00:15:24:09 00:15:24:22 1105

1101 1102 1108 1109

Figure 11

12/12

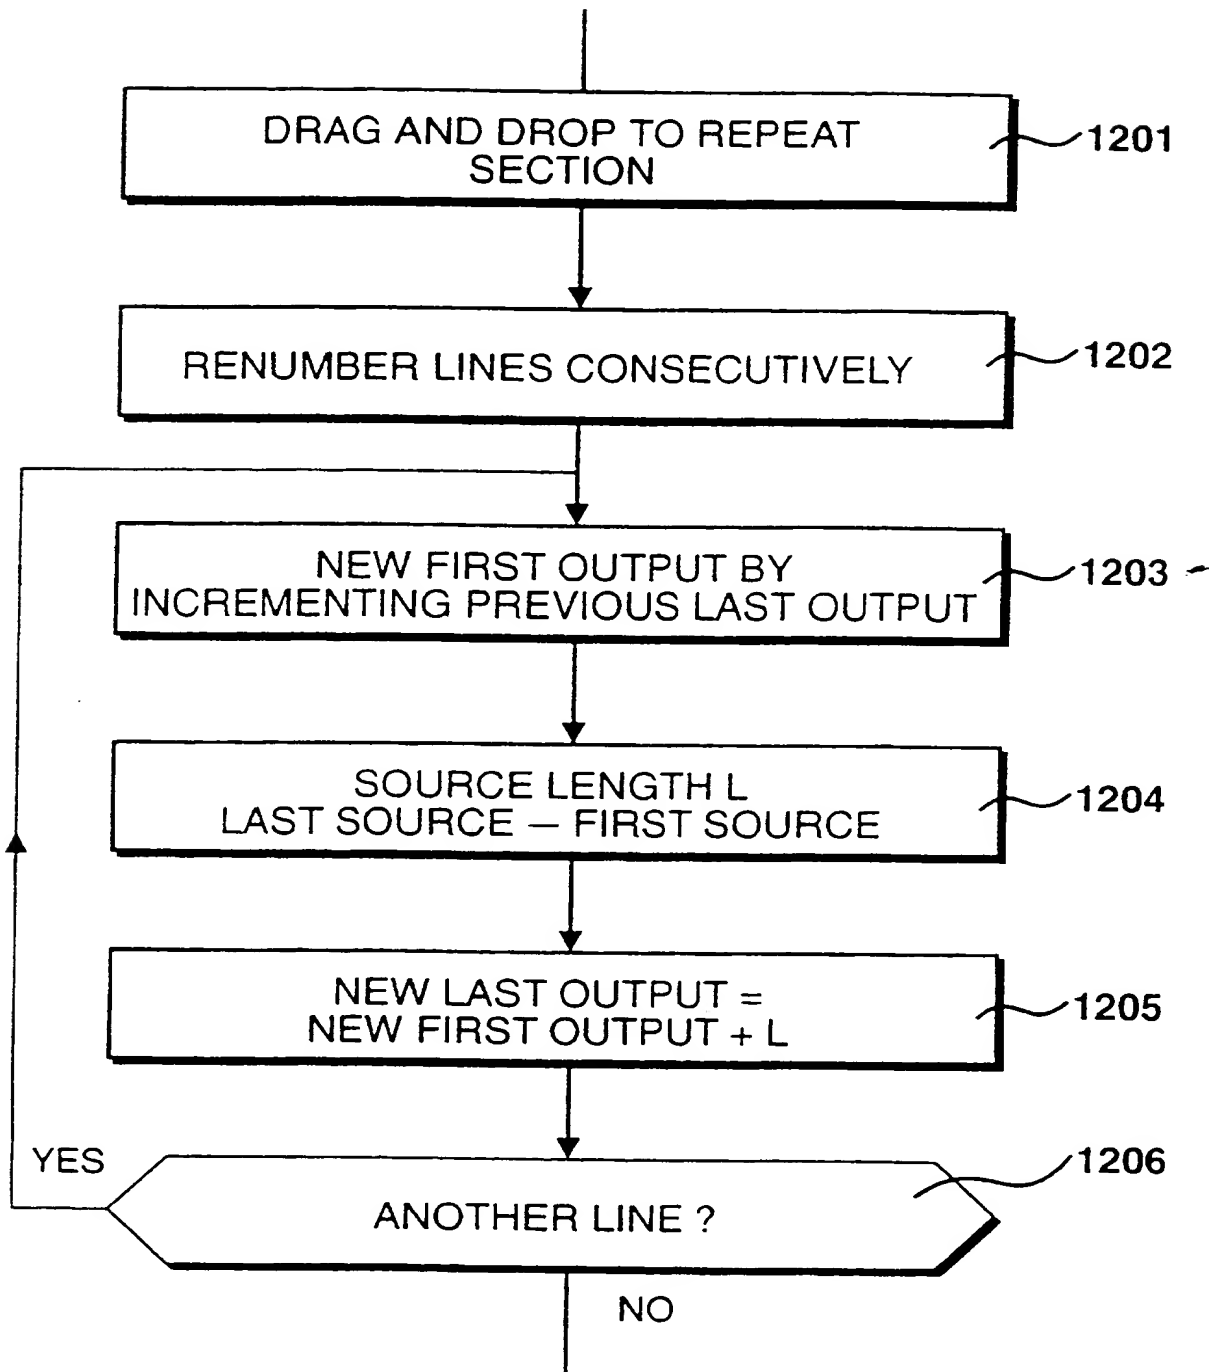*Figure 12*

Processing Edit Decision List Data

5 The present invention relates to data processing apparatus, having input devices, a storage device, a processing device and output devices. The present invention also relates to a method of processing data representing an edit decision list, wherein said edit decision list has edit decisions with edit data and frame range data.

10 In the post production of both cinematographic films and broadcast quality video, it is always necessary to perform a process of on-line editing in which the original source material is edited to produce the final result, which may in turn be used as a master from which final commercial copies are produced.

15 An off-line editing procedure allows an edited version to be produced without the risk of damaging the original source material. In this way, many possibilities may be considered before a final version is produced. In this way, it is possible to use off-line editing facilities to produce a list of edit decisions which may then be implemented in the final on-line process.

20 This procedure of performing an off-line edit followed by an on-line edit has been implemented within digital image processing systems, in which a relatively modest processing system may perform off-line editing, upon reduced resolution images, under the control of a graphical user interface. Thus, in this way, image frames may be presented to a user in any form considered appropriate whereafter the system will automatically generate an edit decision list, often recorded onto a standard floppy disc or similar data carrying medium.

25 An edit decision list may subsequently be used in a conventional editing facility or, alternatively, it may be used in a digital image processing facility at high definition. A system of this type is licensed by the present applicant under the trademark "FIRE". In this way, after an edit decision list has been produced, it would be possible to make modifications in an off-line

30

system, resulting in the production of a new edit decision list or in an on-line system, where the on-line edits may be modified such that, in some respect, they differ from the edits proposed by the original list.

Both on-line environments and off-line environments require significant processing facilities and in some situations the level of editing required may be relatively minor. However, presently, unless an edit decision list is edited manually, which is difficult when most lists are only conveyed in machine readable form, it would be necessary to implement changes on a full editing system, which would usually incur significant facility costs and require the reloading of source material.

According to a first aspect of the present invention, there is provided data processing apparatus, comprising input devices, a storage device, a processing device and output devices, wherein said storage device is configured to receive data representing an edit decision list; said edit decision list has edit decisions with edit data and frame range data; an input device applies input data to said processing device in response to user manipulations specifying changes to said edit data; and said processing device is configured to identify an associated function of the identified edit data, calculate a modification to said range data in response to said identified function, and write said modified range data to said storage device.

In the preferred embodiment, the processing device is configured to identify a particular entry of an edit decision list in response to the position of the cursor displayed by an output device and said processing device is configured to determine a data type by determining the position of the data type with reference to line delimiters. Preferably, the processing device is configured to identify an associated function by reference to a look-up table.

According to a second aspect of the present invention, there is provided a method of processing data representing an edit decision list, wherein said edit decision list has edit decision with edit data and frame range data, said method comprising steps of loading an edit decision list into

addressable memory locations; receiving input data in response to user manipulations of an input device identifying edit data and modifications to said edit data; identifying an associated function of the identified edit data; calculating a modification to said range data in response to said identified function and said user specified modification; and writing said modified range data to addressable storage locations.

Preferably, the edit data represents an edit type and said frame range data represents a range of source frames, wherein said edit type is modified resulting in modifications being made to said source range. Said edit type may represent a cut and said cut may be modified to represent a dissolve or a wipe. Preferably, the dissolve or wipe frames require input frames from two sources and said source range is modified to represent an overlap of frames for the duration of said wipe or said dissolve.

In a preferred embodiment, the edit data represents a unique line identifier and said frame range data represents a range of output destination frames, wherein said unique identifier is modified resulting in a modification to said destination range. The identified function may be a copy, resulting in edit decisions being copied to create additional uniquely identified lines and said destination ranges may be modified to specify new output images. The position of said new lines may be defined by a process of dragging and dropping an identified range of lines within the existing edit decision list.

Preferably, frame ranges are modified by performing calculations upon time codes defining frames in terms of hours, minutes, seconds and frame numbers.

The invention will now be described by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a post-production facility house, including a facility for editing edit decision lists;

Figure 2 illustrates editing operations performed by the facilities house shown in *Figure 1*;

Figure 3 details the edit decision list editing facility identified in *Figure 1*, including a processing system and interface devices.

Figure 4 details the processing system identified in *Figure 3*, including a central processing unit, storage devices and interface cards;

5 *Figure 5* details processes performed by the central processing unit identified in *Figure 4*, including a process for identifying functions associated with a user selection;

Figure 6 details the identification step included in *Figure 6*;

10 *Figure 7* identifies the structure of an edit decision list processed by the environment identified in *Figure 3*;

Figure 8A illustrates an edit decision list having an identification of a cut being selected for modification to a dissolve;

15 *Figure 8B* shows the edit decision list of *Figure 8A* after the cut has been converted into a dissolve and range data has been modified in accordance with the present invention;

Figure 9 illustrates the operation performed when converting the edit decision list of *Figure 8A* representing a cut to the edit decision list of *Figure 8B* representing a dissolve;

20 *Figure 10* illustrates the function called to re-calculate edit decision range data;

Figure 11 illustrates an operation of copying edit decision list data with range data being re-calculated; and

Figure 12 illustrates the function called to effect the modification illustrated in *Figure 11*.

25 A post production facility house is illustrated in *Figure 1*, having facilities for performing post production operations on broadcast quality video material, high definition video material and digitised cinematographic film.

30 The facility house includes a machine room **101** having a high performance computer **102** such as an "onyx" manufactured by Silicon Graphics Inc. Computer **102** is interfaced to a plurality of D1 digital video tape

recorders **103** and a real-time frame storage device **104**, configured as a redundant array of discs. Computer-executable instructions are loaded into computer **102** via a suitable computer-readable medium, such as a CD ROM. In response to these instructions, computer **102** is configured to provide post production functionality within the environment shown in *Figure 1*.

In addition to the machine room **101**, the facility house includes an image transfer facility **105**, effects processing facilities **106** and **107**, a full definition on-line editing facility **108**, a reduced definition off-line editing facility **109** and a general purpose processing station **110** configured, amongst other things, to perform edits directly to edit decision lists, usually generated as the output from an off-line editing operation, possibly performed by the off-line editing facility **109**, prior to commencing an on-line editing session, possibly using on-line editing facility **108**. Many stations similar to station **110** may be provided within the facility house and these stations may be used for general purpose data processing operations in addition to executing procedures specific to post production editing.

Procedures performed within the editing facility identified in *Figure 1* are illustrated in *Figure 2*. At step **201** original source material is produced, either as cinematographic film or as video. If produced as cinematographic film, a digital video representation of this film may be produced by scanning the film at station **105**.

At step **202** off-line editing is performed upon a low definition representation of the source material, resulting in the production of an edit decision list. Conventionally, this edit decision list may be used to create the final result as part of an on-line editing process. However, the facility shown in *Figure 1* allows further editing to be effected upon the edit decision list itself, whereafter further editing again may be performed within on-line suite **108**.

After performing the off-line editing step **203**, a first EDL, EDL 1, is supplied to the EDL editing facility **110** to perform EDL editing at step **204**. A

second EDL is produced from this process, represented as EDL 2 and this, in combination with the original source material, is supplied to step 205, allowing on-line editing to be performed, possibly by on-line editing facility 108. Thereafter, at step 206 output video may be produced and recorded to appropriate video tape via a recorder 103. Alternatively, edits may be performed on cinematographic film or electronically manipulated material may be used to generate new image frames for conventional editing with the existing film stock.

EDL facility 110 is detailed in *Figure 3* and includes a relatively modest processing system, such as a personal computer or an "O2" produced by Silicon Graphics Inc. Operational functionality is provided by computer 301 by receiving executable instructions conveyed by a machine-readable medium such as a CD ROM. Computer 301 may receive edit decision lists over a network cable 302 or, alternatively, edit decision lists may be supplied to the machine via a floppy disc receivable within floppy disc drive 303. The system is completed by operational instructions for effecting manipulations upon the edit decision list in response to manual manipulation effected by an operator. Thus, an operator is provided with a keyboard 304 and a mouse 305 or similar pointing device, in combination with a visual display unit 306.

A hardware environment for the processing system 301 is detailed in *Figure 4*, in which a central processing unit 401 receives executable instructions from an associated randomly accessible memory 402. Some memory is also used for the temporary storage of data. Permanent storage is provided by a hard disc unit 403 and an internal addressable bus 404 provides communication to a graphics card 405 along with communication from keyboard port 406 and a serial port 407, these being connected to monitor 306, keyboard 304 and mouse 305 respectively.

The central processing unit 401 also communicates with its floppy disc drive 303 and a network card 408. The hardware shown in *Figure 4* is complemented by executable instructions in order to effect the EDL editing

process **204** shown in *Figure 2*.

Referring to *Figure 5*, an edit decision list is written to random access memory **402** from disc drive **303** or via network cable **302** and network card **408**. The edit decision list is presented to an operator by being displayed on the visual display unit **306**.

In response to the edit decision list being presented graphically to a user, it is possible for the user to make particular selections, by operation of the mouse **305** to identify particular ASCII characters making up the edit decision list held in the random access memory **402**.

Having selected a particular character within the edit decision list, the system, at step **503**, identifies the user modification request and at step **504** the system identifies a function associated with the particular user selection. At step **505** the system performs processing appropriate to the selected function and thereby effects a modification to the edit decision list held in RAM at step **506**.

At step **507** a question is asked as to whether modifications have been finished and if answered in the negative, control is returned to step **502**. If, at step **507**, a detection is made to the effect that the modifications have been finished, resulting in the question asked at step **507** being answered in the affirmative, the edit decision list is transferred to the local hard disc drive **403** and, if required, written to a floppy disc drive or written back to the network array.

Step **504** for the identification of a function associated with a user selection is detailed in *Figure 6*. A manual operation of the mouse **305** (or similar pointing device) results in movement of a cursor which is viewable by means of the visual display unit **306**. XY movements of the mouse are detected which are then converted into character positions upon the screen. After making a particular character selection, forming part of the EDL, the co-ordinates for the selected characters are received by the processing system at step **601**.

At step **602** the edit decision list is analysed by tracking back, character by character, until the start of line is identified for the particular selected characters.

At step **603**, the process works through the line of characters to
5 identify the context of the particular selected characters and at step **604** a question is asked as to whether the selected characters are valid. The selected characters are considered to be valid if they form part of an actual edit decision. Thus, the characters will be considered as being invalid if they merely relate to a comment or other non-edit directed text string. This results
10 in the question asked at step **604** being answered in the negative and control being directed to step **609**. At step **609** a null function is selected, thereby insuring that no further processing is performed upon invalid data.

When the question asked step **604** is answered in the affirmative, the particular function associated with the selected characters is identified. This
15 identification is made based upon the position of the selected characters within the edit decision line.

At step **606** further processing of the decision line is performed in order to obtain data arguments for the associated function detected at step
20 **605**.

At step **607** a test is performed to determine whether the data arguments are valid and if this question is answered in the negative control is again directed to step **609**.

If the question asked at step **607** is answered in the affirmative, data arguments are prepared for processing at step **608**, possibly involving
25 procedures such as translating an ASCII encoded number into a numerical representation, whereafter control is directed to step **505**.

The processing of the edit decision list considers the list as having lines of edit decisions, wherein each of said lines may be considered as being made up of edit data and frame range data. Edit data will represent a
30 unique line entry for the edit decision, a source reel, a data type and an edit

type. Thus, for example, the data type may distinguish between video data and audio data and an edit type may identify the type of edit, which may take the form, typically, of a cut, a dissolve or a wipe. The frame range data will identify a range of frames for the input source and the destination output and therefore represents a range of frames lying within the source reel or, ultimately, making up part of the output reel.

The edit decision list is loaded into addressable memory locations as previously described and input data is received in response to user manipulations of the mouse, or similar device, to identify edit data. Thus, in response to manual operations of the mouse, particular items of edit data may be selected, such as, line entries or edit types. When a selection of this type has been made, an associated function is identified. Thus, having identified a particular data type within the edit data, it is possible to perform particular types of functions depending upon the particular type of edit data selected. Having made an identification of this type, the system is configured to modify range data by calculating an appropriate modification in response to the identified function and in response to a user specified modification. Thereafter, the modified range data is written to an addressable storage location.

In this way, it is possible for an operator to perform powerful editing manipulations without the recourse to the full off-line editing facility or the full on-line editing facility. Furthermore, in some environments, facilities of this type may not readily be available or, as is often the case within a facility house, are being used for other purposes. Thus, the provision of an EDL editing facility allows the use of more powerful stations to be optimised and for the overall throughput of the facility to be increased.

Edit decision lists define edit decisions using ASCII characters in the form of a series of lines delimited by carriage return characters. Each line of the edit decision list containing edit data includes fields delimited by character spaces. Thus, an entry position along the line may be determined by

counting the number of character spaces and the start of the line may be determined by the position of the nearest carriage return.

As shown in *Figure 7*, a line of an edit decision list may be considered as being made up of two portions; portion **701** representing edit data and portion **702** representing frame range data. The edit data **701** is initiated by a
5 unique event number **703** and edit lines are contained within the list in sequential event number order. The event number entry or field **703** is followed by a source name field **704** which identifies a source reel of input material, usually in the form of digital video tape. This is followed by field **705**
10 which identifies the data type being made up of either video or audio. This is followed by an edit type field **706** which details how the particular clip under consideration, identified by source name **704**, is to be connected to the previous clip. In its simplest form, the edit type identifies a cut but in more sophisticated systems the edit type may represent a wipe, a dissolve or a
15 particular special effect.

The frame range data **702** only contains time codes and it is this area where significant calculation is required in order to ensure that the correct time code entries are made. Frame range data includes an identification of the first source frame **707**, followed by an indication of the last source frame
20 **708**. These are in turn followed by an identification of the first output frame **709** and, finally the frame range data includes an indication of the last output frame **710**. Frame references **707** to **710** are all defined as time codes, specifying hours, minutes, seconds and frame number. The number of frames present during each second of the clip will vary depending upon the
25 particular standard concerned. Thus, for example, cinematographic film will typically contain 24 frames per second, PAL video will contain 25 frames per second and NTSC video will contain 30 frames per second.

The embodiment provides an environment in which qualitative amendments may be made to the edit data resulting in quantitative
30 modifications being made to the frame range data, so as to maintain the

overall integrity of the edit decision list. Two particular examples of these operations will be detailed although it should be appreciated that other functional operations are possible based on this underlying principle.

5 In a first example, an operator selects the edit type field **706** and performs a conversion, usually converting a cut into a dissolve or a wipe. Such a conversion is difficult to implement, because a situation in which a clean break occurs from one source to another source is modified such that an overlap of frames occurs in order for the wipe or the dissolve to be implemented. In a second example, event numbers are modified by
10 effectively making a copy of lines of the edit decision list. In the example, several lines of the edit decision list may be selected under manual control and, as is known, in conventional graphical user interfaces, a selected portion of the edit decision list is dragged and dropped, under the operation of the mouse **305**. The operation effectively renumbers lines of the edit decision list,
15 modification to event numbers **703** of the edit data **701**, and the system is required to re-calculate new output frame numbers, specified at fields **709** and **710**.

An example of the procedure for converting a cut decision into a dissolve decision is shown in *Figure 8A* and *Figure 8B*. Initially, the edit
20 decision list illustrated in *Figure 8A* is displayed on visual display unit **306**. An operator places a cursor **801** over the edit type C of event 026 and depresses key "D" on keyboard **304**, informing the process that the cut at line 026 is to be converted to a dissolve. After striking an enter key on keyboard **304**, the operator enters the number of frames present in the dissolve which,
25 in this example, has been entered as a six frame dissolve. On striking the enter key again, the edit decision line 026 is modified to that shown in *Figure 8B*. Thus, as shown in *Figure 8B*, the cut identified by cursor **801** has been converted to a D **802** indicating that the edit type is a dissolve and not a cut. This is followed, in accordance with convention, by a number **803**
30 representing the number of frames present in the dissolve which, as shown in

Figure 8B, has been represented as 006, indicating a six frame dissolve.

However, in addition to making these modifications to the edit data, in accordance with the present invention, modifications have also been made to the frame range data. Furthermore, these modifications, in addition to being made to edit decision line 026, have also been made to the previous line 025.

The nature of the dissolve is illustrated in *Figure 9*. A cut point, as defined by line 026 of the EDL in *Figure 8A*, is indicated by line **901**. Frames **902** above cut line **901** are derived from reel 1, with frames **903** below cut line **901** being derived from reel 2. The last frame **902** of reel 1 is identified by time code 02:31:42:11:, as specified by the last source frame in edit line 025 of *Figure 8A*. After the edit has been made, this frame effectively becomes frame 00:02:14:15: of the output frame, as identified by the last output frame field in line 025 of *Figure 8A*.

The next frame in the output reel is given the next consecutive time code, namely 00:02:14:16:, which is derived from frame 00:14:36:10: of reel 2, as specified by line 026 of *Figure 8A*.

The six frame dissolve is illustrated at **904**, consisting of six frames D1 to D6 in which output data is derived from two source frames. Thus, when a dissolve of this type occurs, it is no longer possible to specify a clean cut as cut line 901 and a degree of overlap must occur such that, before the system stops obtaining frames from reel 1, the system commences obtaining frames from reel 2. Thus, during the dissolve period, two source frames are considered and merged in varying amounts in order to provide the dissolve effect. A similar situation arises when a wipe is defined in which the proportion of the image increases gradually from one source to the other. Thus, a dissolve may be considered as a gradual transition of all of the pixels whereas a wipe consists of a sudden transition which occurs over parts of the image for the wipe duration.

In order to perform the dissolve, the position of the source reels remains the same relative to the output time code. Thus, output frame

00:02:14:16 will still be derived from input frame 00:14:36:10 of reel 2. However, in addition, it will also contain a proportion of the next frame from reel 1, namely 02:31:42:12, a frame which was not present in the original cut edit. Thus, in order to achieve a dissolve it is necessary for handles of appropriate length to be present within the stored clip so that some of the previously unrequired frames may be introduced into the final edit.

The period of the dissolve, frames D1 to D6, is positioned centrally about the notional cut point, in accordance with convention. It is possible to move the location of the dissolve although this is more readily achieved by first moving the position of the cut and then defining a dissolve which is positioned centrally about the new cut position. In this way, in order to provide a six frame dissolve, it is necessary for a further three frames to be derived from reel 2, preceding frame 00:14:36:10 and for a further three frames to be derived from reel 1 following after frame 02:31:42:11. This needs to be reflected in the last source frame field 708 of reel 1 (line 025) and in the first source frame field 707 of reel 2, line 026. Thus, as shown in *Figure 8B*, the last input frame defined by timecode **804** has been modified compared to the equivalent time code at location **805**. In particular, three frames have been added such that this clip will terminate at frame 02:31:42:14. This is also reflected in the last output frame field **710**, such that time code **806** has also been increased by three frames as represented by time code **807** in *Figure 8B*.

At line 026 it is necessary to advance the first source frame from time code 00:14:36:10, as shown by time code **808**, to 00:14:36:07, as shown by time code **809**. Similarly, on the output side, the first output time code has been advanced from 00:02:14:16 as shown at **810**, to 00:02:14:13 as shown at **811**.

On detecting an operation to the effect that a cut is to be converted into a dissolve, the system refers to a look-up table to identify a function which will perform the required editing to the edit decision list. The function

called by this operation is shown in *Figure 10* and process **1001** includes the step of identifying the situation to the effect that the cut is to be changed to an N frame dissolve where N equals 6 in the previously described example.

As described with reference to *Figure 9*, the six frame dissolve results in an additional three frames being required from each of the two input sources. Thus, at step **1002** the dissolve depth D is calculated by dividing the number of frames N making up the dissolve by two.

Calculations in time code need to be done in the appropriate time code base which is represented as hours, minutes, seconds and frame numbers. Thus, calculations must be performed on the basis that 60 minutes are present within each hour, 60 seconds are present within each minute, and 24, 25 or 30 frames are present each second etc. depending upon the particular type of material being considered. Thus, at step **1003** the dissolve depth D calculated at step **1002** is converted into a time code representation.

At step **1004**, new time code values for the previous line are calculated. The last source frame **708** is identified as the source end ES and the last output frame **710** is identified as the output end EO. Each of these values is increased by the value D, such that the new value for ES equals ES plus D and the new value for EO equals EO plus D, all of these calculations being performed in the time code base.

A similar operation is performed for the selected line at step **1005**. Thus, the first source frame **707** is identified as the source start SS and the first output frame is identified as the output start SO. Again, the dissolve depth D is added to each of these values such that the new value for SS equals SS plus D and the old value for SO equals SO plus D. At step **1006** the newly calculated values are re-written as edit lines, as shown in *Figure 8B*.

The procedure of dragging and dropping time code entries is illustrated in *Figure 11*. In this example, lines 025 and 026, which were previously modified to convert a cut into a dissolve, are now copied such that

similar events occur after event 154. If performed, for example, under a conventional text editor, the dropping of line 025 after line 154 would result in a line retaining its event number as 025. In accordance with edit decision list protocols, this would have no meaning in that this particular event has
5 already been put in place and would merely result in a repetition of work that has already been done during the on-line process.

The dragging and dropping of identified lines within the edit decision list, in accordance with the present invention, results in the updating of the event number field 703 within the edit data such that, on dropping these
10 events, the event numbers are modified to the next available numbers, shown at 1101 and 1102 which are 155 and 156 respectively in this example. Thus, in accordance with this procedure, the edit data has been modified and the system is now required to make appropriate amendments to the frame range data.

15 In this situation, the source material remains the same but the time code location of the output material should be contiguous with the rest of the edit decisions. Thus, the last output frame field 710 shown by time code 1103 represents the end of the output source material prior to the copying being effected. In the example shown, this gives a time code of 00:15:23:18, such
20 that the next frame will be given time code 00:15:23:18.

In the copied time code, the first output frame of line 025 has the value of 00:02:14:05, shown at time code location 1104. As shown at time code location 1105, this value has been replaced with the required value 00:15:23:19.

25 The size of the clip remains the same, therefore the last output frame field 710, represented by time code 1106 is also modified to 00:15:24:08. Thus, the difference between these values is equivalent to the difference between values indicated at 1107 and 1104. However, the clip is now continuous with the earlier edits.

Similar modifications are made to line 156, such that the first output frame field **709**, shown as time code location **1108** is made contiguous to the value at **1106**. Similarly, the last output frame indicated by time code **1109** is updated such that the difference between time codes **1109** and **1108** is the same as the difference between the timecodes in the source line 026, identified as **1110** and **1111**.

On detecting a modification of edit data to the effect that edit lines have been renumbered, a function call is made, resulting in a function being implemented, as illustrated in *Figure 12*.

At step **1201** the function is identified as that being required for a drag and drop to repeat a section and at step **1202** the event numbers in field **703** of the edit data are re-numbered so as to provide consecutive edit lines.

In accordance with this operation, any number of lines present within the edit decision list may be dragged and dropped therefore the updating of timecode forming part of the frame range data may require iterations.

At step **1203** the new first output **709** is considered and is effectively replaced by a previous last output frame in **710** incremented by one frame. Thus, as described with reference to *Figure 11*, timecode **1105** is calculated by incrementing time code **1103** by one frame. At step **1204** the source length **L** is calculated by referring to the original line and by subtracting the first output frame at field **709** from the last output frame at field **710**. Referring to the example shown in *Figure 11*, this consists of subtracting timecode **1104** from timecode **1107** to give the number of frames present within that edit represented as a source length **L**.

At step **1205** the new last output in field **710** is calculated by adding the difference **L** to the new first output. Thus, in the example shown in *Figure 11*, timecode **1106** is determined by adding **L** calculated at step **1204** to timecode **1105**.

At step **1206** a question is asked as to whether another line is present and when answered in the affirmative control is returned to step **1203**. In the

example shown in *Figure 11*, the question asked at step **1206** would be answered in the affirmative after processing line 155. Thereafter, steps **1203** to **1205** would be performed to update line 156 whereafter the question asked at step **1206** would be answered in the negative.

Claims

1. Data processing apparatus, comprising input devices, a storage device, a processing device and output devices, wherein said storage device is configured to receive data representing an edit decision list; said edit decision list has edit decisions with edit data and frame range data;

an input device applies input data to said processing device in response to user manipulations specifying changes to said edit data; and said processing device is configured to identify an associated function of the identified edit data, calculate a modification to said range data in response to said identified function, and write said modified range data to said storage device.

2. Apparatus according to claim 1, wherein said processing device is configured to identify a particular entry of an edit decision list in response to the position of a cursor displayed by an output device; and said processing device is configured to determine a data type by determining the position of the data type with reference to line delimiters.

3. Apparatus according to claim 2, wherein said processing device is configured to identify an associated function by reference to a look-up table.

4. A method of processing data representing an edit decision list, wherein said edit decision list has edit decisions with edit data and frame range data, said method comprising the steps of loading an edit decision list into addressable memory locations; receiving input data in response to user manipulations of an input device identifying edit data and a modification to said edit data;

identifying an associated function of the identified edit data;
calculating a modification to said range data in response to said
identified function and said user specified modification; and
writing said modified range data to an addressable storage location.

5

5. A method according to claim 4, wherein said edit data
represents an edit type and said frame range data represents a range of
source frames, wherein

said edit type is modified resulting in modifications being made to said
source range.

10

6. A method according to claim 5, wherein said edit type
represents a cut and said cut is modified to represent a dissolve or a wipe.

15

7. A method according to claim 6, wherein said dissolve or wipe
frames require input frames from two sources and said source range is
modified to represent an overlap of frames for the duration of said wipe or
said dissolve.

20

8. A method according to claim 4, wherein said edit data
represents a unique line identifier and said frame range data represents a
range of output destination frames, wherein

said unique identifier is modified resulting in modifications to said
destination range.

25

9. A method according to claim 8, wherein said identified function
is a copy, edit decisions are copied to create additional uniquely identified
lines and said destination ranges are modified to specify new output images.

10. A method according to claim 9, wherein the position of said new lines is defined by a process of dragging and dropping an identified range of lines within the existing edit decision list.

5 11. A method according to claim 4, wherein frame ranges are modified by performing calculations upon time codes defining frames in terms of hours, minutes, seconds and frame numbers.

10 12. A computer-readable medium having computer-readable instructions executable by a computer such that said computer performs the steps of:

loading an edit decision list into addressable memory locations;

receiving input data in response to user manipulations of an input device identifying edit data and modifications to said edit data;

15 identifying an associated function of the identified edit data;

calculating a modification to said range data in response to said identified function and said user specified modification; and

writing said modified range data to an addressable storage location.

20 13. A computer-readable medium having computer-readable instructions according to claim 12, such that when executed by a computer said edit data represents an edit type and said frame range data represents a range of source frames, wherein said edit type is modified resulting in modifications being made to said source range.

25 14. A computer-readable medium having computer-readable instructions according to claim 13, such that when executed by a computer said edit type represents a cut and said cut is modified to represent a dissolve or a wipe.

5 15. A computer-readable medium having computer-readable instructions according to claim 14, such that when executed by a computer said dissolve or wipe frames require input frames from two sources and said source range is modified to represent an overlap of frames for the duration of said wipe or said dissolve.

10 16. A computer-readable medium having computer-readable instructions according to claim 12, such that when executed by a computer said edit data represents a unique line identifier and said frame range data represents a range of output destination frames, wherein said unique identifier is modified resulting in modifications to said destination range.

15 17. A computer-readable medium having computer-readable instructions according to claim 16, such that when executed by computer said identified function is a copy, edit decisions are copied to create additional uniquely identified lines and said destination ranges are modified to specify new output images.

20 18. A computer-readable medium having computer-readable instructions according to claim 17, such that when executed by a computer the position of said new lines is defined by a process of dragging and dropping an identified range of lines within the existing edit decision list.

25 19. A computer-readable medium having computer-readable instructions according to claim 12, such that when executed by a computer frame ranges are modified by performing calculations upon time codes defining frames in terms of hours, minutes, seconds and frame numbers.

20. In a computer system having a graphical user interface including a display and a user interface selection device, a method of processing data representing an edit decision list, wherein

5 an edit decision list is displayed to a user as lines of EDL text having edit data and frame range data;

a user identifies and modifies edit data by operation of said selection device; and

in response to machine-executable instructions, frame range data is modified in response to said manual modification of said edit data.

10

21. Data processing apparatus substantially as herein described with reference to the accompanying drawings.

15

22. A method of processing data representing an edit decision list, substantially as herein described with reference to the accompanying drawings.



Application No: GB 9816323.1
Claims searched: 1 to 20

Examiner: Peter Easterfield
Date of search: 17 December 1998

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK CI (Ed.P): G5R (RB81)
Int CI (Ed.6): G11B 27/028, 27/029, 27/031, 27/036
Other: Online: WPI, EDOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X,P	GB 2312081 A (TEKTRONIX) see page 29, line 10 to page 33, line 19	1,4,5,8,20
X,P	EP 0803873 A2 (MATSUSHITA) whole document	1,2,4,5,8,20
X	EP 0526064 A2 (GRASS VALLEY) see col 5, lines 19-31 and col 19, lines 12-15	1,4,20
X	WO 93/21635 A1 (AVID) see page 10, line 31 to page 11, line 13	1,4,20

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.